


**CEILING**



**ADS/SB**


Ceiling access panels specifically designed to fit into the structural membrane of the **Armstrong Drywall Grid System**.

<b>FIRE RATING</b>	<b>AIRTIGHT</b>	<b>ACOUSTIC</b>
		
<b>not rated</b>	<b>not rated</b>	<b>not rated</b>

**LOCK OPTIONS**

Budget Lock	Suited Keylock	Tamper Keylock	5mm Bit Insert	Ball Catch	Touch Catch	Dzus Catch	Slotted Lock	Euro Profile	3 Way Lock	IP65 Insert
-------------	----------------	----------------	----------------	------------	-------------	------------	--------------	--------------	------------	-------------

*Some locks have size restrictions. Please contact our technical department for more information*

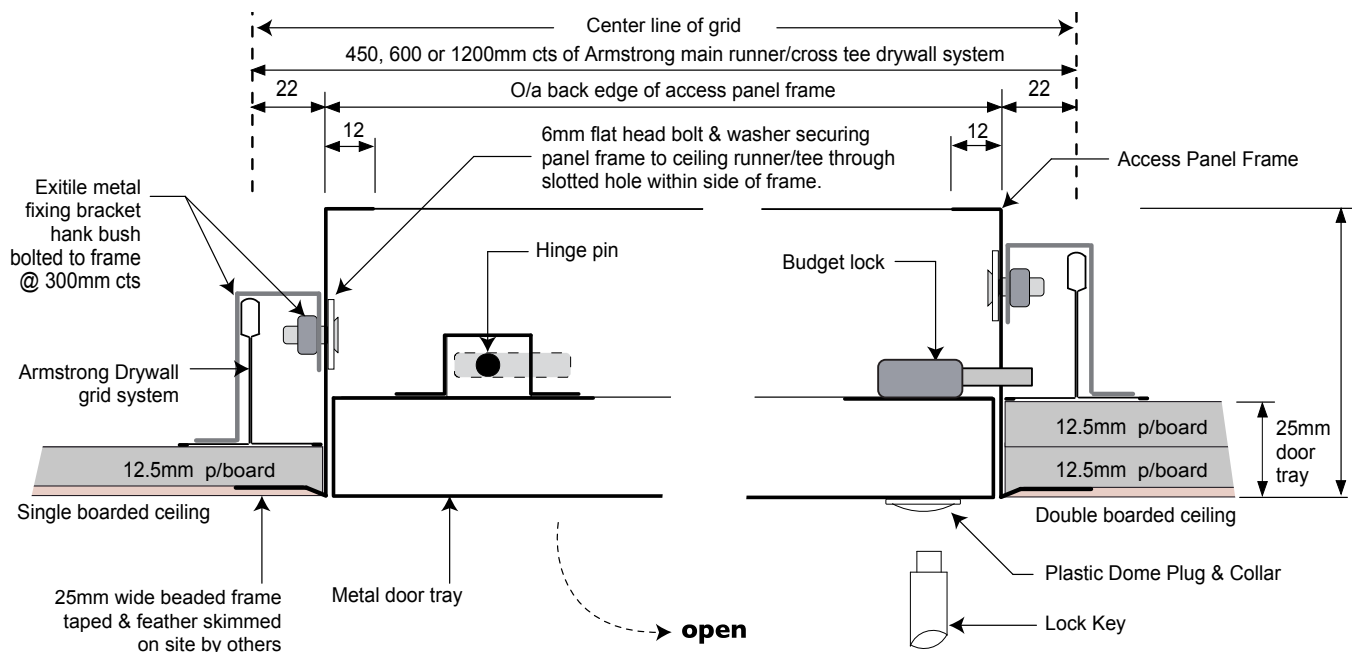

**Description**

The access panel is inserted directly into a pre-cut hole in the ceiling membrane prior to wet finishes being applied, and is fixed into position using the frame clamps provided. Supplied with a beaded frame to allow for tape and feather skimming on site and comes complete with a fully removable flush metal door.

**Construction**

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The panels are also available in Stainless Steel for use in corrosive areas (quote using product code and ref SS). The removable door trays are fitted with a sliding pin hinge and standard budget lock.

**Dimensions**

Panel sizes are governed by the actual grid size of the Armstrong Drywall System, and increase in increments of 150mm from a nominal minimum size of 450 x 450mm, up to a maximum size of 1200 x 1200mm nominal.

When specifying the size required, please state the actual size of grid around the access panel opening e.g. 450 x 450mm, 600 x 450mm, 600 x 600mm, 1200 x 600mm etc.

**Fitting**

The access panel will require independent bracing and support, which is sufficient to secure and also allow safe opening

of the access panel within the ceiling system. For panels greater than 600 x 600mm it is advisable to request the fitting of safety chains.



**For Further Information:**

Tel: +44 (0)24 7635 2771

Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

