


**CEILING**



**MT/PF/FD** (over 600 x 600mm)

Designed to fit into any type of **fire rated ceiling system**, allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

**FIRE RATING**



**60 mins**

**AIRTIGHT**



**not rated**

**ACOUSTIC**



**not rated**

**LOCK OPTIONS**

Budget Lock

Suited Keylock

Tamper Keylock

5mm Bit Insert

Ball Catch

Touch Catch

Dzus Catch


Slotted Lock

Euro Profile

3 Way Lock

IP65 Insert

*Some locks have size restrictions. Please contact our technical department for more information*

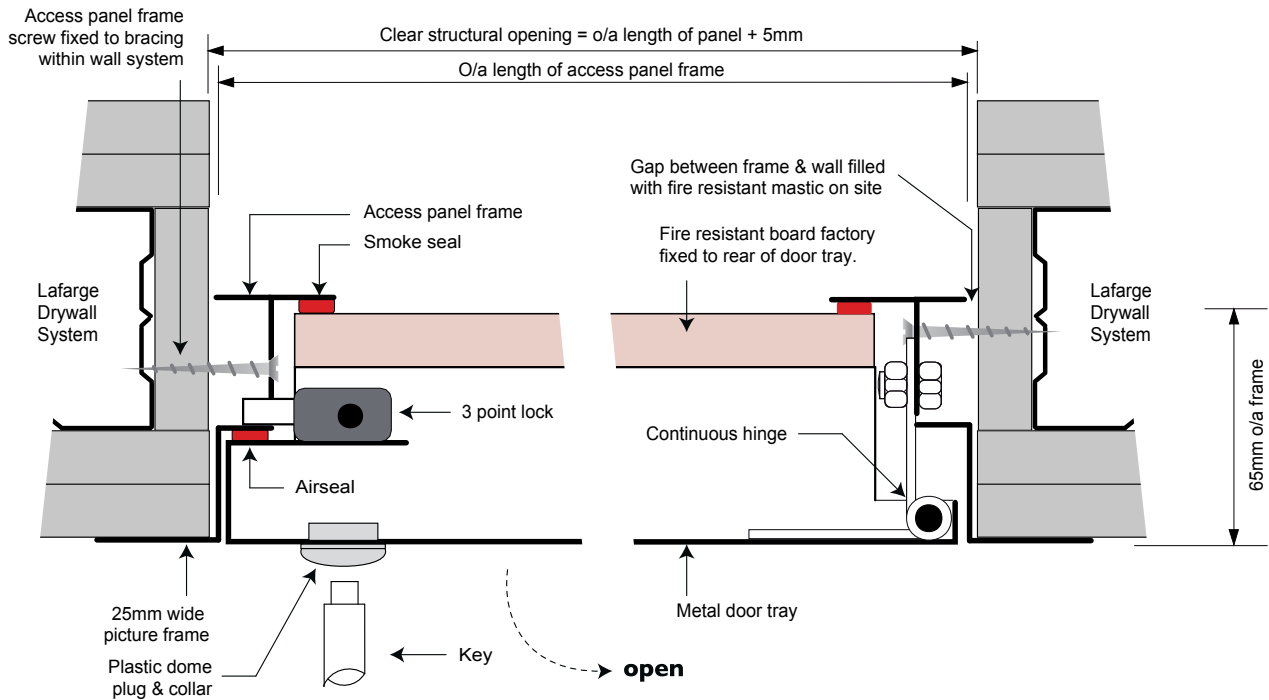

**Description**

A picture frame surround is provided, which enables the panel to be inserted directly into a pre-cut hole, and is screw fixed into position through the side of the panel frame. This is a 1 Hour Fire Rated Access Panel which has been tested to B.S.476: Part 22:1987.

**Construction**

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt whiteRal 9010, 20% Gloss (other colours available upon request). The panels are also available in Stainless Steel for use in corrosive areas (quote using product code and ref SS). The removable door trays are fitted with a sliding pin hinge and standard budget lock.

**Dimensions**

Any size can be manufactured to order within maximum and minimum dimensional constraints. For further information please contact our Technical Sales Department.

**Fitting**

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the ceiling system.

When installing the access panel, the actual size of structural opening in the ceiling needs to be +5mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 605 x 605mm.



**For Further Information:**

Tel: +44 (0)24 7635 2771

Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com