


WALL & CEILING



WD/SB/FD

Designed to fit into **any type of wall (or ceiling) system**, allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

FIRE RATING



60 mins

AIR TIGHT



not rated

ACOUSTIC




not rated

LOCK OPTIONS

- Budget Lock
- Suited Keylock
- Tamper Keylock
- 5mm Bit Insert
- Ball Catch
- Touch Catch
- Dzus Catch
- Slotted Lock
- Euro Profile
- 3 Way Lock
- IP65 Insert

Some locks have size restrictions. Please contact our technical department for more information

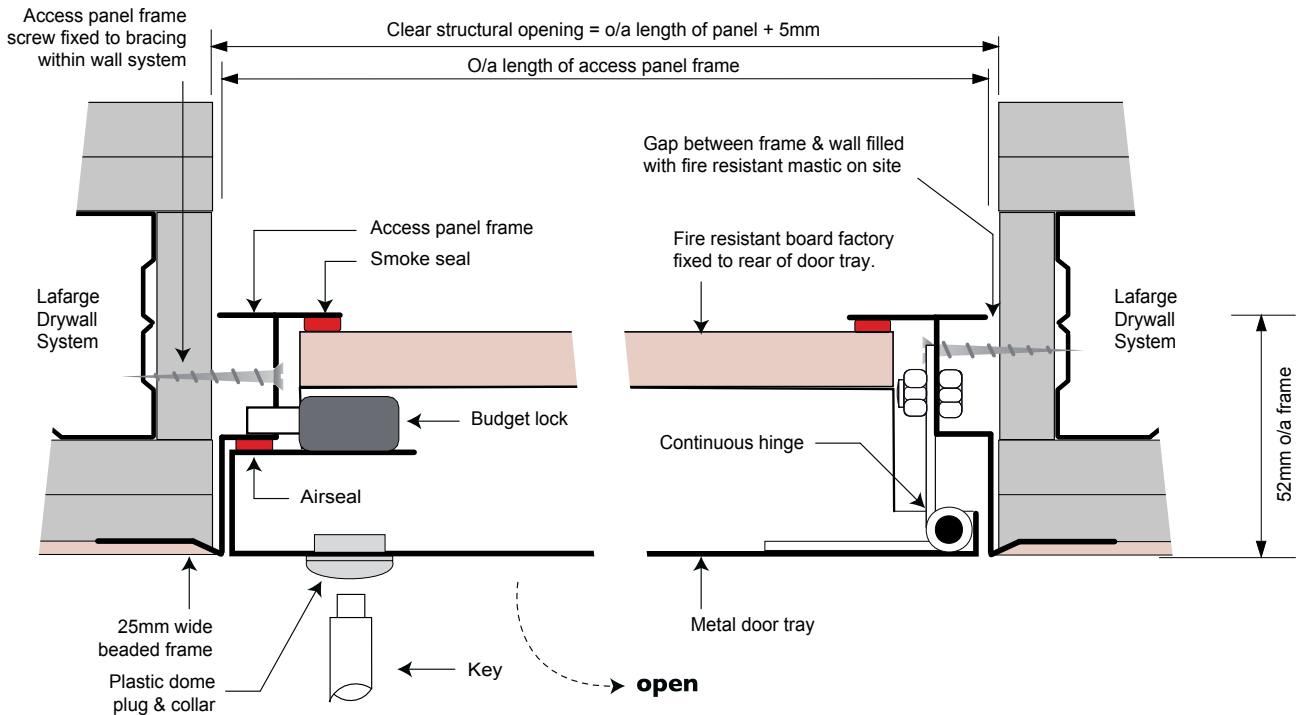

Description

Designed to fit into the structural membrane of jointless plasterboard wall/ceiling systems. Supplied with a beaded frame to allow for tape and jointing on site and comes complete with a fully removable flush metal door. It is inserted directly into a pre-cut hole through the face of the wall/ceiling prior to wet finishes being applied. This is a 1 Hour Fire Rated Access Panel which has been tested to B.S.476: Part 22:1987.

Construction

Constructed from 1.2mm and 1mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The panels are also available in Stainless Steel for use in corrosive areas (quote using product code and ref SS). The removable flush metal door is fitted with a continuous metal hinge, and is

secured using a standard budget lock.

Dimensions

Standard stock sizes are available as shown below. Non-standard sizes can be manufactured to order within maximum and minimum dimensional constraints. For further information please contact our Technical Sales Department. Sizes shown are overall dimension to inside edge of frame:

- 300 x 300mm
- 450 x 450mm
- 600 x 600mm
- 900 x 600mm (hinged on long side)
- 1200 x 600mm (hinged on long side)

Fitting

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and

support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. When installing the access panel, the actual size of structural opening in the wall/ceiling needs to be +5mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 605 x 605mm.



For Further Information:

Tel: +44 (0)24 7635 2771

Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

