

WALL

AC46/SB

An acoustic access panel suitable for use in any wall/partition system within a building that requires some form of **sound/noise containment**.

FIRE RATING



not rated

AIRTIGHT



not rated

ACOUSTIC



46dB

LOCK OPTIONS

Budget Lock

Pushed Keylock

Tamper Keylock

Smart Bit Insert

Ball Catch

Touch Catch

Door Catch


Slotted Lock

Euro Profile

3 Way Lock

IP65 Insert

Some locks have size restrictions. Please contact our technical department for more information

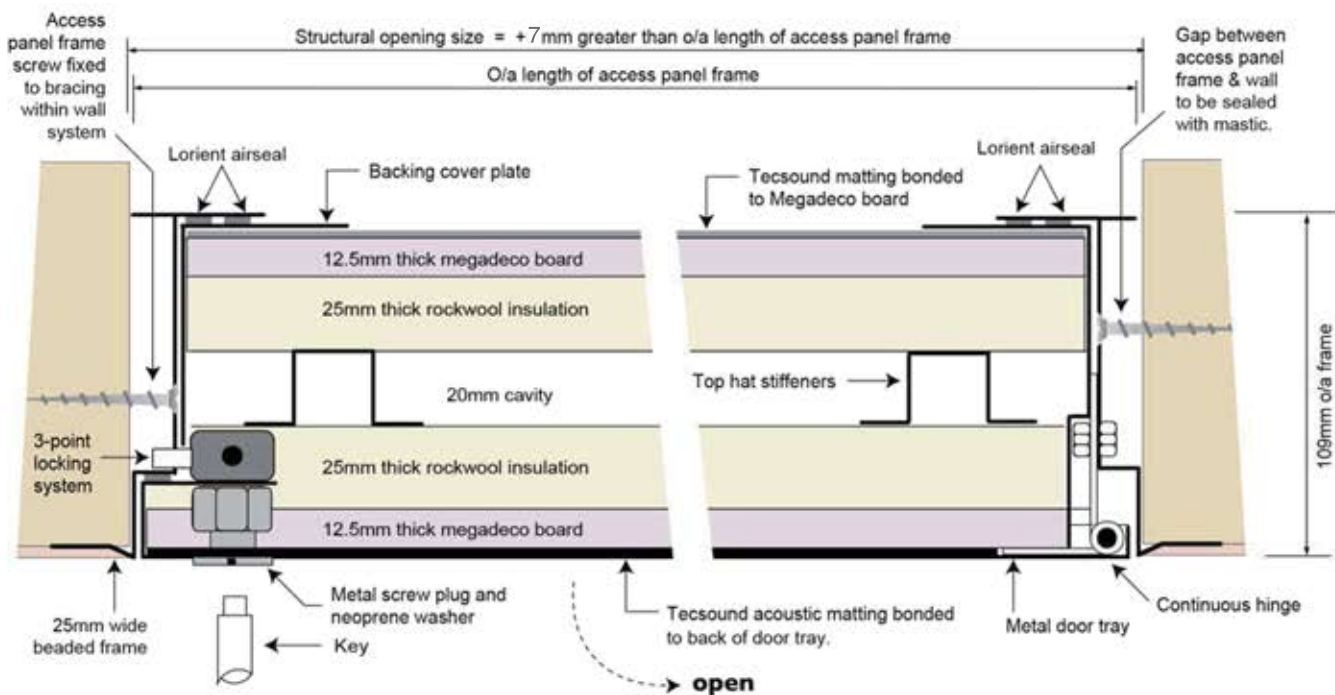

Description

This panel is designed to fit into the structural membrane of jointless plasterboard wall systems. It is supplied with a beaded frame to allow for tape and jointing on site. It is inserted directly into a pre-cut hole through the face of the wall prior to wet finishes being applied.

Construction

Constructed from 1.5mm and 1.2mm thick Zintec Steel, with a polyester powder coating of matt white Ral 9010, 20% Gloss (other colours available upon request). The removable metal door is backed with acoustic matting and filled with layers of rockwool insulation and Lafarge Megadeco board. The door is sealed at the back with a double layer of Lorient Seal. The door is secured using a 3-point locking system.

Dimensions

Any panel sizes can be manufactured to order within maximum and minimum dimensional constraints. For further information please contact our Technical Sales Department.

Fitting

The access panel will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall system. When installing the access panel, the actual size of structural opening in the wall needs to be +7mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 605 x 605mm.



For Further Information:

Tel: +44 (0)24 7635 2771

Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com