

XL/WD/TD/TC

Designed to fit into any type of wall or ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

FOR
CEILING
AND
WALL

Lock Type



Non Rated



Fire Rating

Non Rated




Airtight

Non Rated



Acoustic

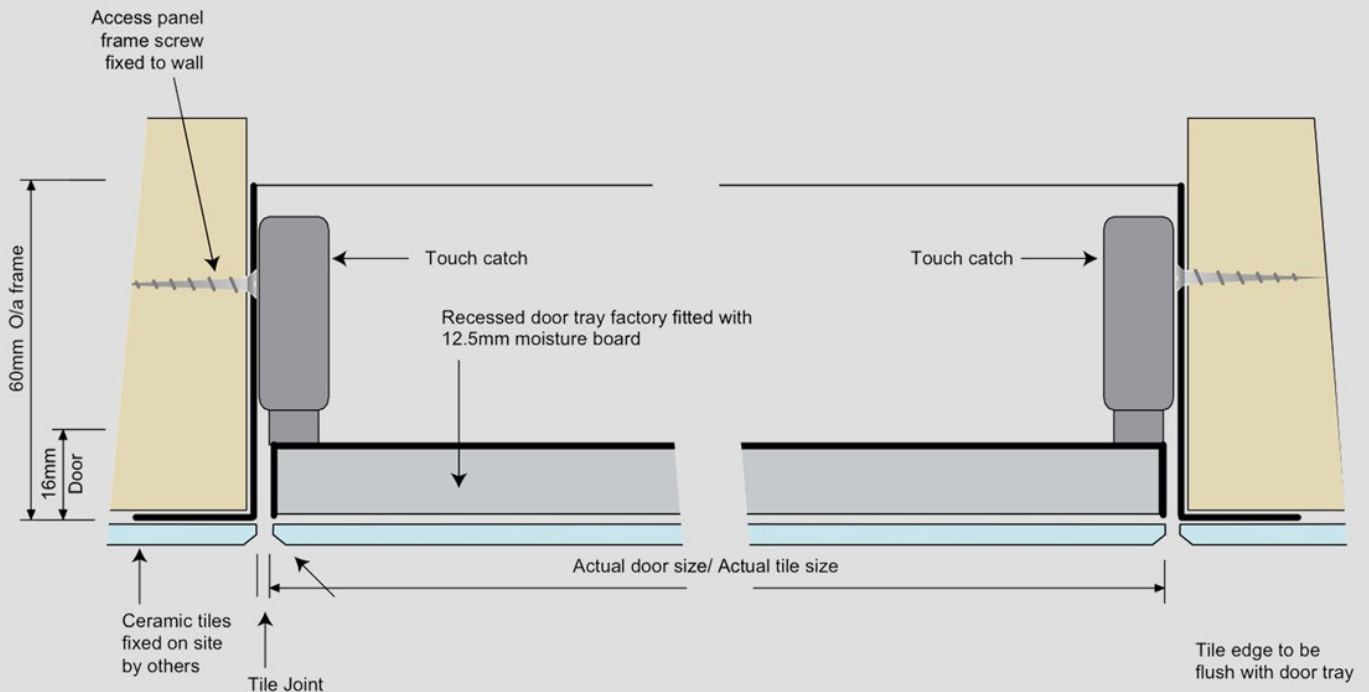

Description

The frame and recessed door tray are manufactured from 1.0 mm thick Zintec Steel which is polyester powder coated to RAL 9010; 20% Gloss. The recessed door is a lift out type which is held in place at the top of the door with two push and release type catches fixed to the inside edges of the frame. The bottom of the door is held in place by an angle plate fixed to the panel frame. Upon releasing the catches, the door can be lifted away from the frame. The door tray contains a 12.5 mm thick factory fitted moisture board infill.

Sizes

Sizes available upon request.

Fitting

The frame is designed to be screw fixed through the side into suitable bracing within the wall/partition prior to tiling taking place. It is imperative that the edge of the tile fixed to the door tray is flush with the edge of the door to allow correct alignment of tile joints. After fitting of the finished tiled door into the frame, the gap around the door can be filled with a standard mastic sealant if required. This can then be knifed through using a stanley knife, when required.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

exitile