


XL/WD/TD

FOR
CEILING
AND
WALL

The 'Excel' range of ceramic wall access panels has been introduced to cater for situations where minimal access is required to gain entry to Stop Taps, plumbing joints etc.. which are hidden behind a tiled wall partition.

Lock Type						Non Rated	Non Rated	Non Rated
	Budget	Euro Profile	3 - Way	IP 65	Touch Catch			
						Fire Rating	Airtight	Acoustic

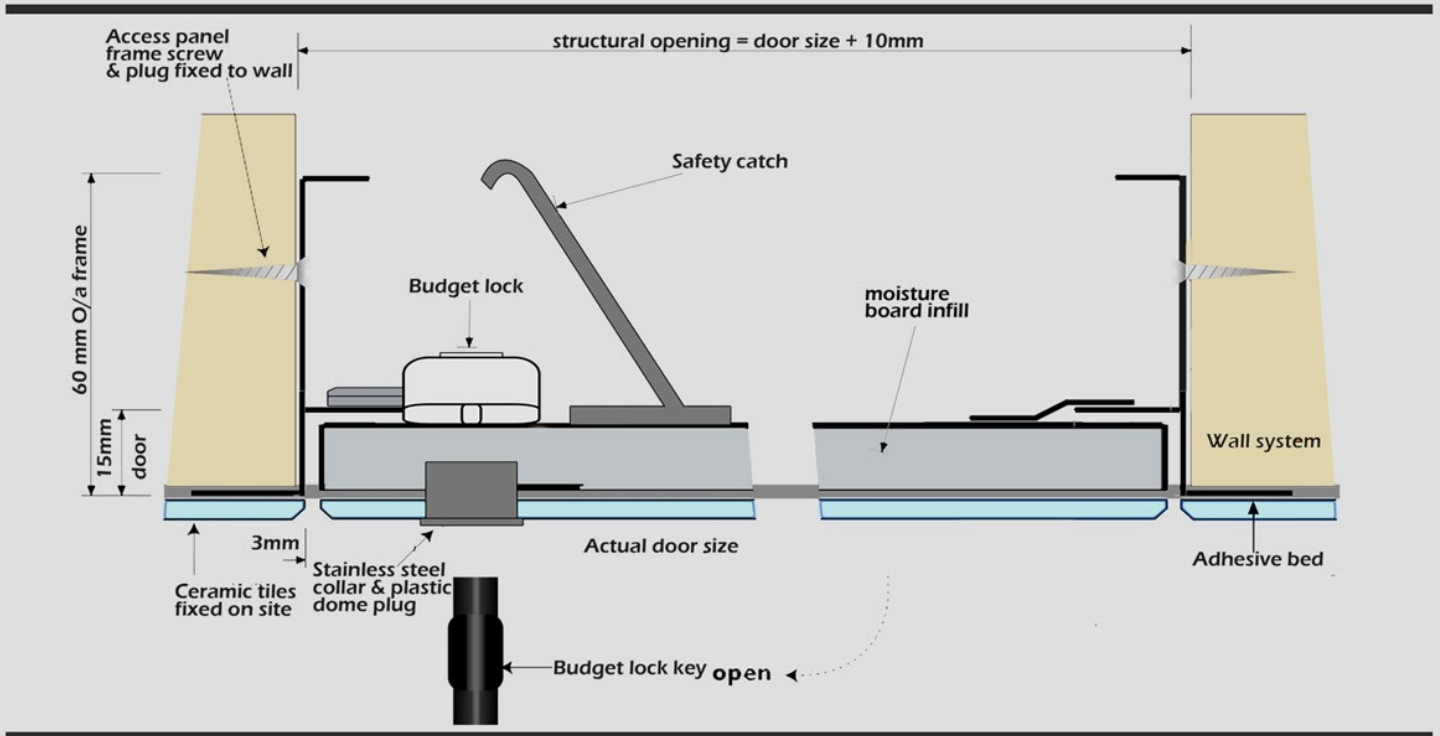

Description

The frame and recessed door tray are manufactured from 1.0 mm thick Zintec Steel which is polyester powder coated to RAL 9010; 20% Gloss. The recessed door is a lift out type which is held in place at the top of the door with a standard budget lock. The bottom of the door is held in place by an angle plate fixed to the panel frame. Upon releasing the lock, the door can be lifted away from the frame. The door tray contains a 12.5 mm thick factory fitted moisture board infill.

Dimensions

Various sizes available upon request.

Fitting

The frame is designed to be screw fixed through the side into suitable bracing within the wall/partition prior to tiling taking place. It is imperative that the edge of the tile fixed to the door tray is flush with the edge of the door to allow correct alignment of tile joints. After fitting of the finished tiled door into the frame, the gap around the door can be filled with a standard mastic sealant if required. This can then be knifed through using a stanley knife, when required.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

