


MP/SB/FD/120/AC30

FOR
CEILING
& WALL

Designed to fit into any type of wall or ceiling system allowing easy access into the cavity/void where regular maintenance to services is required to be carried out.

Lock Type							
	Budget	Suited	Tamper	5mm Bit	Rated	Non Rated	Rated
					Fire Rating	Airtight	Acoustic

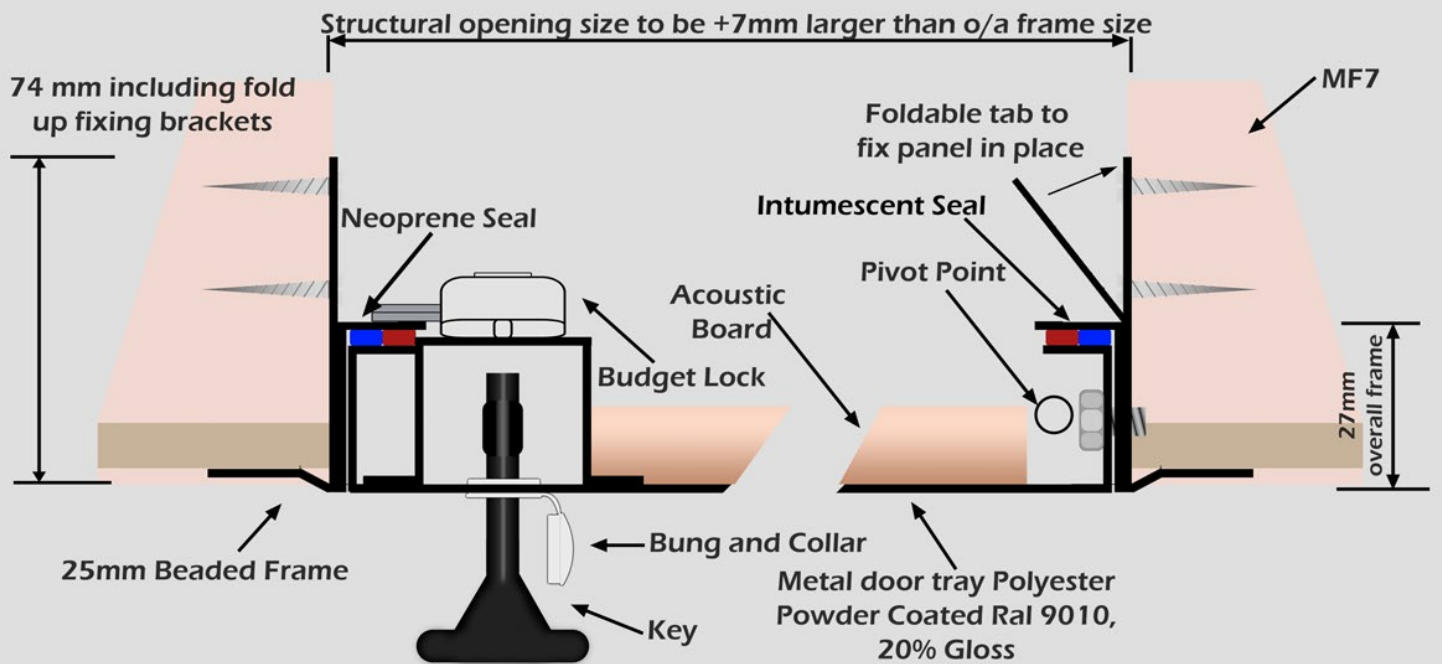

Description

A Beaded frame surround is provided, which enables the panel to be inserted directly into a pre-cut hole, and is screw fixed into position through the side of the panel frame. This panel has a fire rating in accordance with B.S. 476: Part 22:1987 and has an acoustic reduction rating of 30dB in accordance with BS EN ISO 140-3:1995.

Construction

The MP range are constructed from 1mm thick Zintec Steel, and comprise of a fixing frame and a fully demountable door. All surfaces are fully protected with a polyester powder coating of white Ral 9010 20% gloss (other colours available upon request). The door is fitted with a pin hinge, and is secured using a standard budget lock. The panel is fully sealed at the rear perimeter with a neoprene seal.

Dimensions

Please note that the MP Range can be supplied in any size up to a maximum of 600 x 600mm only. For larger sizes please refer to our standard range of access panels, or contact our sales office.

Fitting

The access panel should be screw fixed through the side of the panel frame, and will require independent bracing and support which is sufficient to secure and also allow safe opening of the access panel within the wall/ceiling system. When installing the access panel, the actual size of structural opening in the wall/ceiling needs to be +7mm greater than the overall panel dimension e.g. structural opening for 600 x 600mm will be 607 x 607mm.

Tel: +44 (0)24 7635 2771 Fax: +44 (0)24 7635 2761

E-mail: sales@exitile.com

www.exitile.com

